

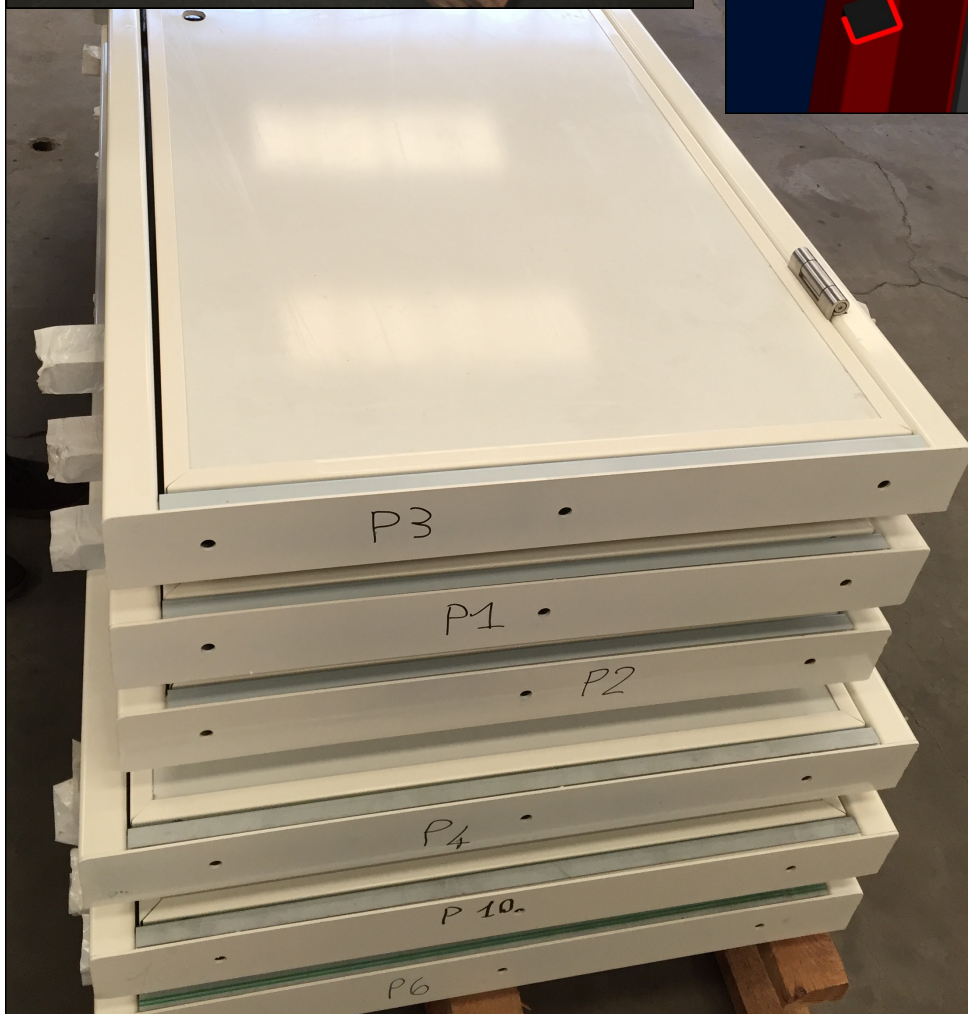
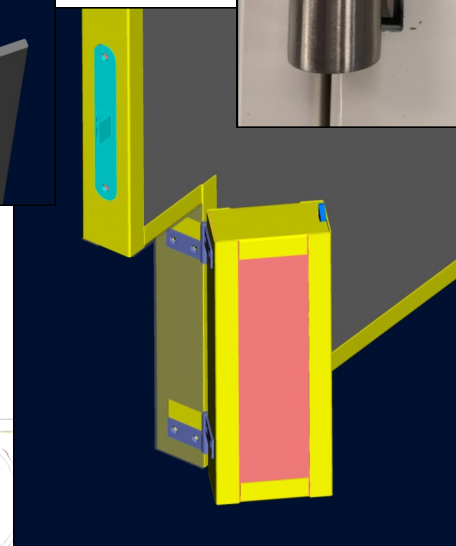


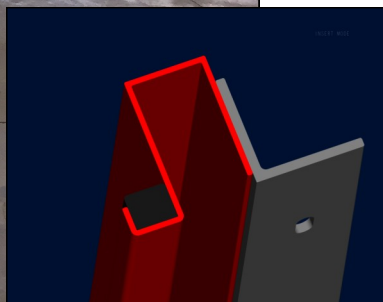

A60 HINGED DOORS

P_1H-A60Y

Alcinav S.r.l.
Via della Repubblica, 45/A
54011 - Albiano Magra - Aulla (MS) - ITALY
Tel.: +39 0187 415455
FAX: +39 0187 415750
www.alcinav.it - info@alcinav.it

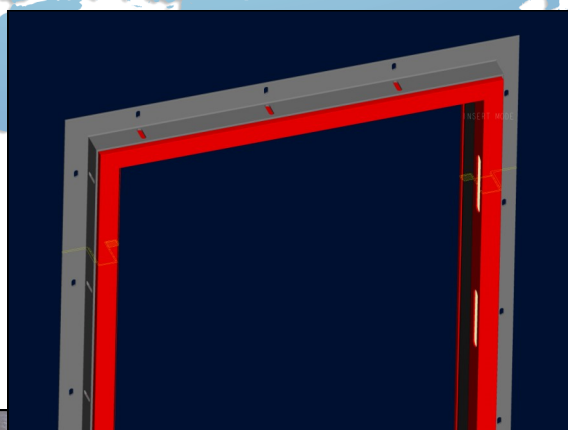

OPTIONALS

- Square porthole (window)
- Round porthole (window)
- Hose port on lower part
- Magnetic door proximity switch
- Hidden door closer with electric module for open position
- Dropdown sill "Athmer"
- Different surface finiture for hinges and lockset plate.
- Rubber gasket color : brown & white

STANDARD FEATURES :

- IMO MED Certification A60 Rated Class
- Nr 3 Adjustable Hinges "Simmonsverke" satin chrome
- Hidden Self closing door "Geze"
- Lockset "Schwepper"
- Rubber gasket black color
- Standard painting powder coating RAL codes
- 3 type of sill configuration
- 45° edge cutting on corner profile







A60 HINGED DOORS

Alcinav S.r.l.
Via della Repubblica, 45/A
54011 - Albiano Magra - Aulla (MS) - ITALY
Tel.: +39 0187 415455
FAX: +39 0187 415750
www.alcinav.it - info@alcinav.it

A60 RATED CLASS SINGLE LEAF HINGED DOOR MAIN FEATURES

1. **Art. name:** P_1H-A60Y
2. **Reference international rules:** SOLAS 74/88 Chapter II-2/9 – European Directive 96/98/CE (MED) and further modifications.
3. **Classification:** A60 rated class fire door, non watertight.
4. **Maximum dimensions:** Clear Opening 1000x2200 mm.
5. **Door type:** single leaf, hinged type.
6. **Leaf construction:** sandwich type, steel foil – rock wool and calcium-silicate – steel foil
7. **Leaf thickness:** 56 mm.
8. **Leaf finishing types:**
 - Galvanized steel (rough)
 - RAL or NCS painted
 - PVC pre-coated (several finishing types)
9. **Weight:** ~ 150 Kg. The weight refers to the above dimensions (CO 1000x2200 mm). It includes frame and counter-frame weight. That weight doesn't include leaf covers.
10. **Leaf covering:** finishing cover on both the leaf sides available. Maximum applicable weight: 30 kg.
11. **Door closer:** concealed type, closing force EN 3-6 (adjustable).
12. **Lock:** stainless steel, no vibrating
13. **Hinges:** nr. 3 stainless steel adjustable hinges
14. **Leaf frame finishing:** RAL or NCS painted or Stainless steel (satin or polished)
15. **Door frame finishing:** RAL or NCS painted
16. **Counter-frame finishing :** 1 coat of primer
17. **Accessories:**
 - Window 400x400 mm - Optional
 - Porthole ϕ 400 mm – Opt.
 - Technical hatch (for wires and tubes) – Opt.
 - Inductive proximity sensor (remote close/open position detection) – Opt.
 - Electromechanical block for door closer (for door remote closing) – Opt.
 - Drop-down sill – Opt.

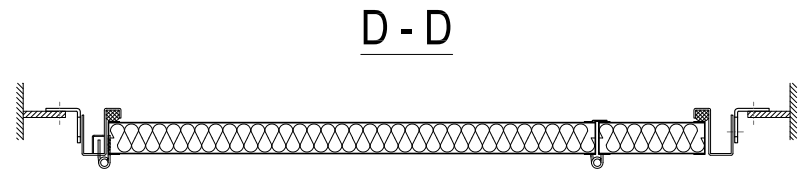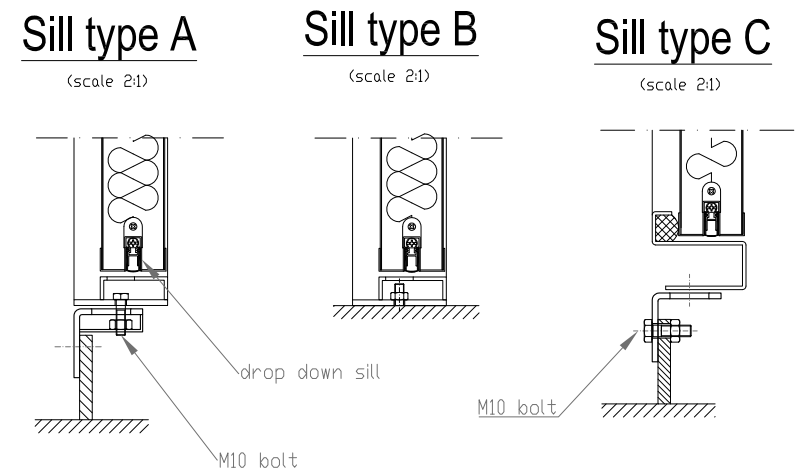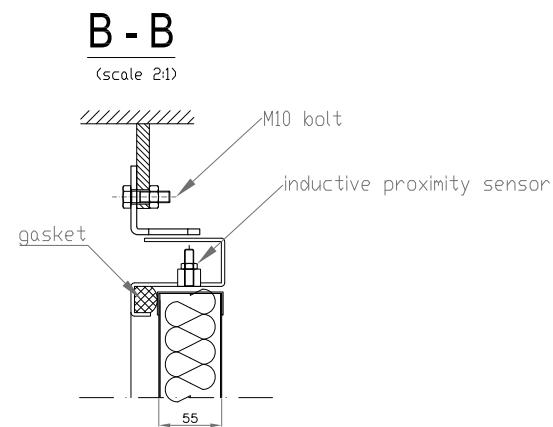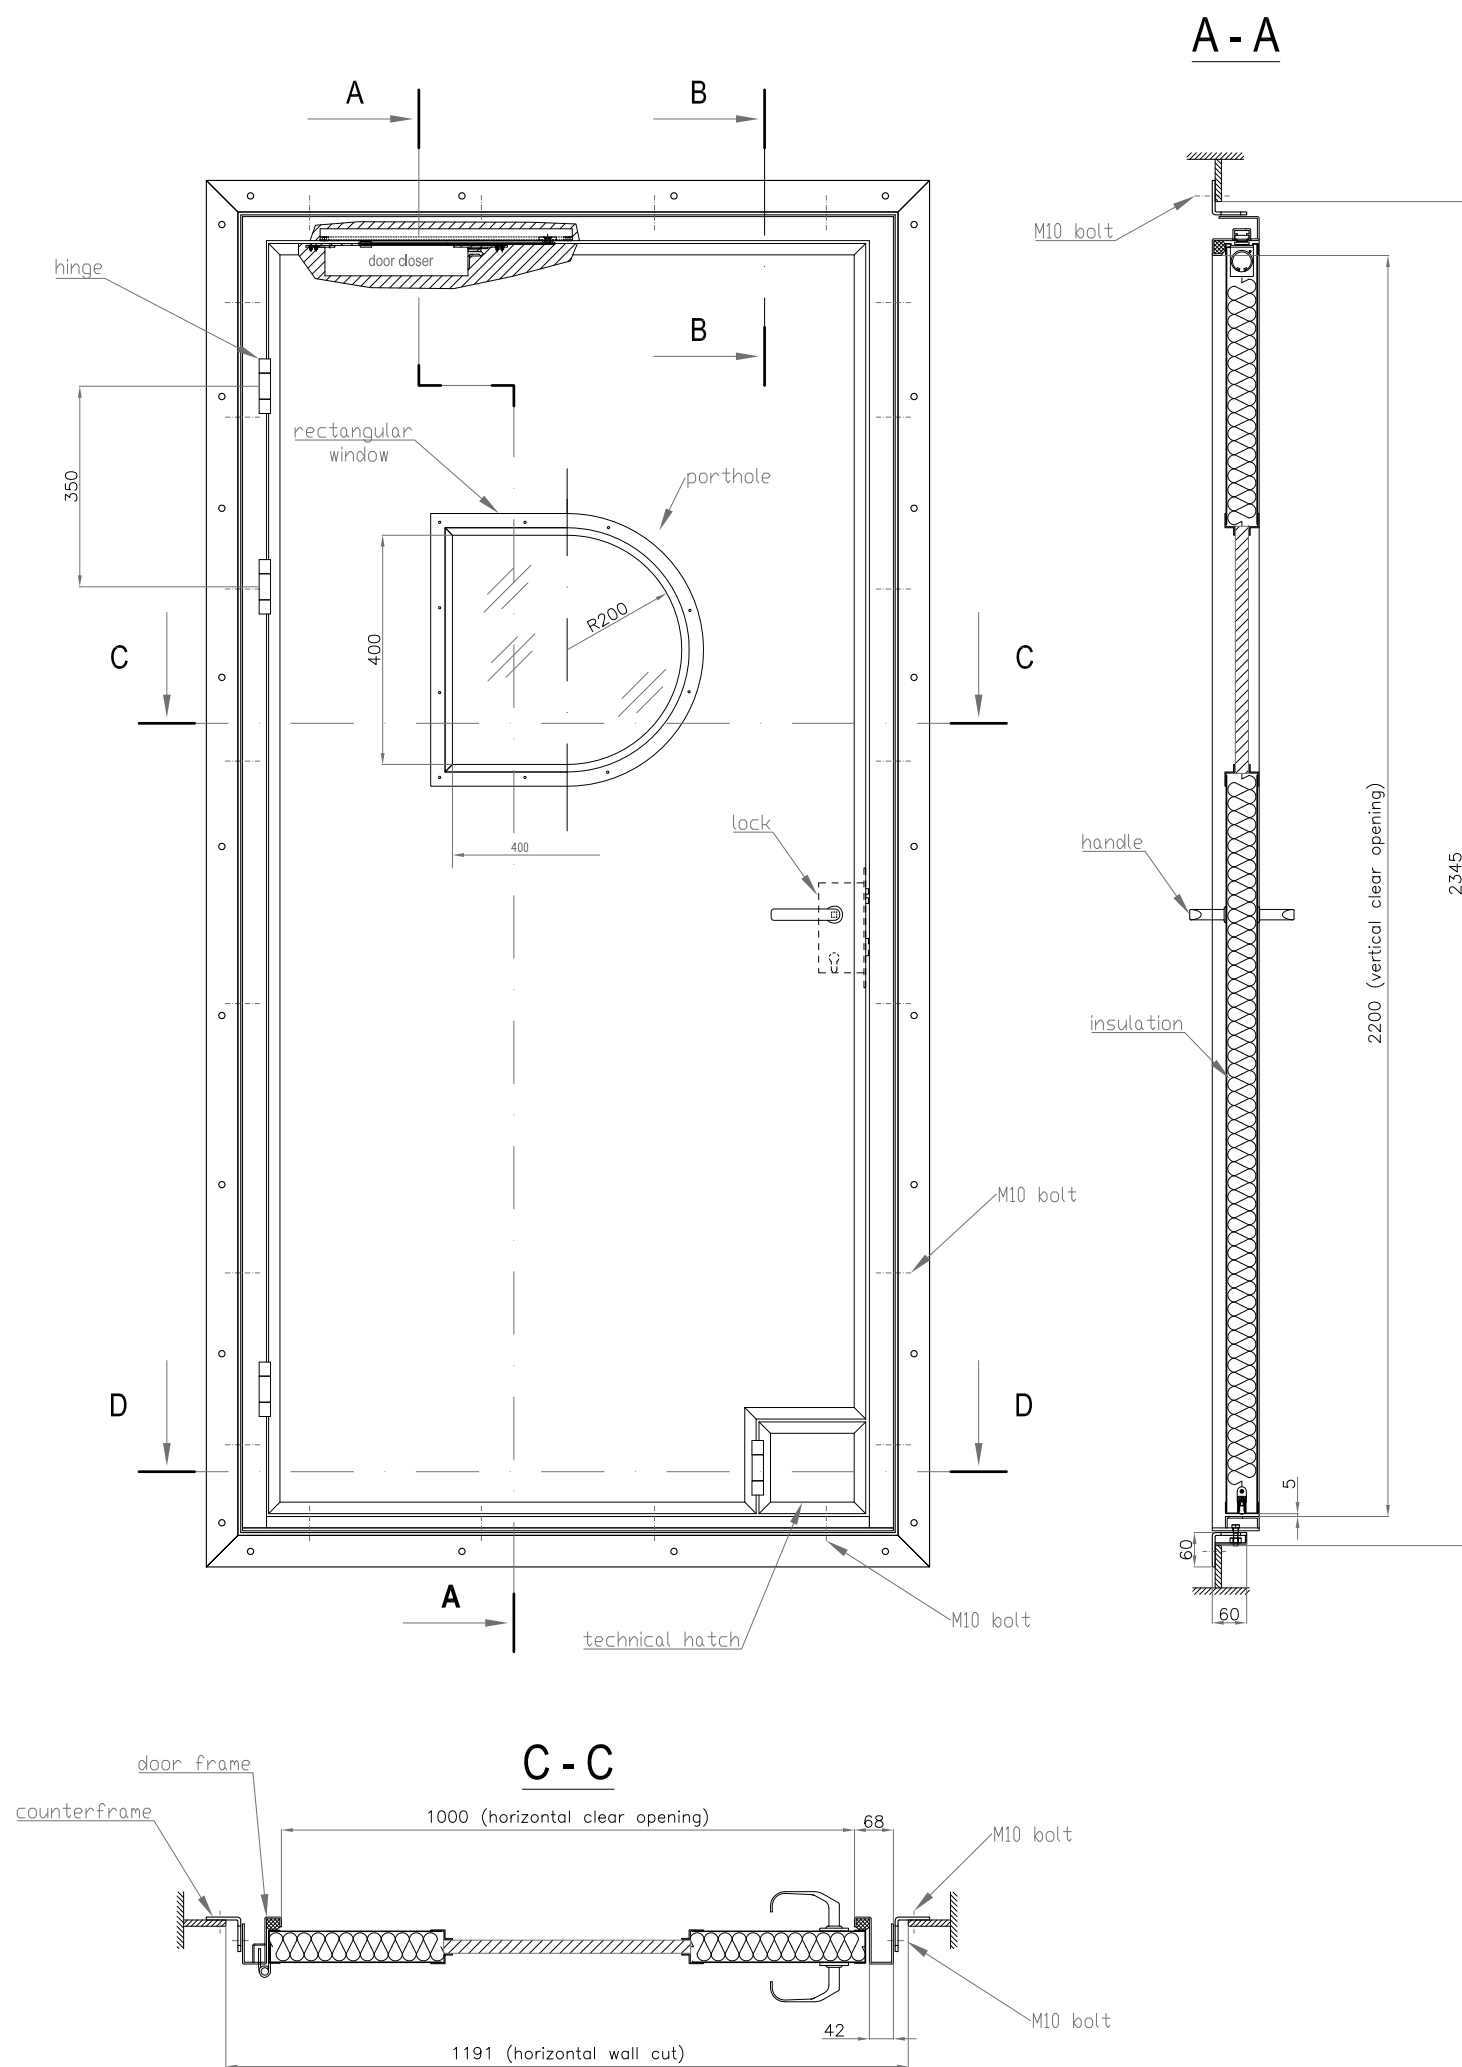

- NOTES:**
1. Clear Opening max : 1000x2200 mm
 2. Maximum available leaf finishing weight : 30 kg
 3. Nr 3 adjustable hinges
 4. Rectangular window max dimension 400x400 mm
 5. Porthole diameter 400 mm
 6. Hidden Doorcloser

- OPTIONALS:**
1. Inductive proximity sensor
 2. Window or porthole
 3. Technical hatch
 4. Drop down sill
 5. Electric release of door closer

00	22/07/2015	PRIMA EMISSIONE		Gessa
REV.	DATE:	DESCRIZIONE / ISSUE		APPROVED
		Committente/Buyer:		Disegno # / Drawing # :
		Costruzione/Ship Name:		Commissa/Job: Scala / Scale :
		Titolo / Title:		
		ALCINAV SRL Via della Repubblica 45/A ALBIANO MAGRA (MS) ITALY TEL : +39 0187 415455 FAX : +39 0187 415750 www.alcinav.it - info@alcinav.it		
		A60 class rated hinged door (P_1H-A60Y)		