



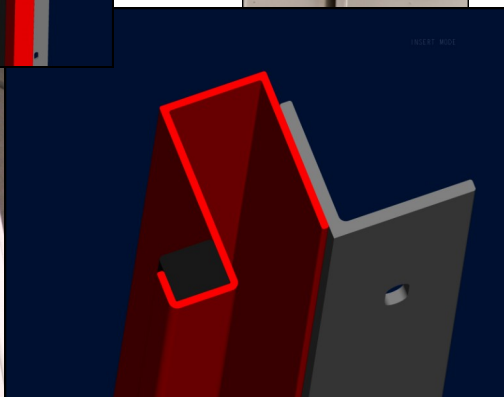

B15 HINGED DOORS

P_1H-B15Y

Alcinav S.r.l.
Via della Repubblica, 45/A
54011 - Albiano Magra - Aulla (MS) - ITALY
Tel.: +39 0187 415455
FAX: +39 0187 415750
www.alcinav.it - info@alcinav.it

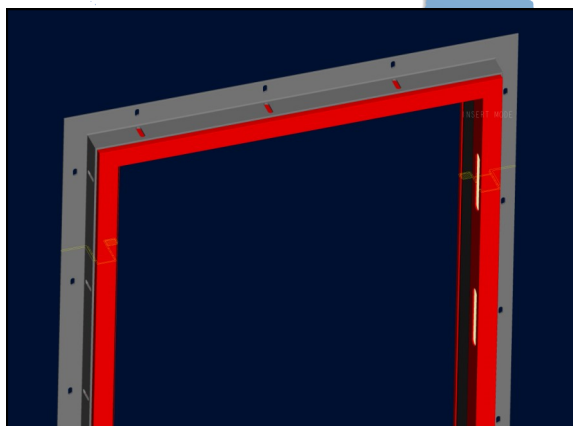

OPTIONALS

- Square porthole (window)
- Round porthole (window)
- Dropdown sill "Athmer"
- Ventilation grid
- Different surface finiture for hinges and lockset plate.
- Rubber gasket color : brown & white

STANDARD FEATURES :

- IMO MED Certification B15 Rated Class
- Nr 3 Adjustable Hinges "Simmonsverke" satin chrome
- Hidden Self closing door "Geze"
- Lockset "Schwepper"
- Rubber gasket black color
- Standard painting powder coating RAL codes
- 3 type of sill configuration
- 45° edge cutting on corner profile






B15 HINGED DOORS

Alcinav S.r.l.
Via della Repubblica, 45/A
54011 - Albiano Magra - Aulla (MS) - ITALY
Tel.: +39 0187 415455
FAX: +39 0187 415750
www.alcinav.it - info@alcinav.it

B15 RATED CLASS SINGLE LEAF HINGED DOOR MAIN FEATURES

- 1) **Art. name:** P_1H-B15Y
- 2) **Reference international rules:** SOLAS 74/88 Chapter II-2/9 – European Directive 96/98/CE (MED) and further modifications.
- 3) **Classification:** B15 rated class fire door, non watertight.
- 4) **Maximum dimensions:** Clear Opening 1000x2200 mm.
- 5) **Door type:** single leaf, hinged type.
- 6) **Leaf construction:** sandwich type, steel foil – rock wool – steel foil
- 7) **Leaf thickness:** 56 mm.
- 8) **Leaf finishing types:**
 - Galvanized steel (rough)
 - RAL or NCS painted
 - PVC pre-coated (several finishing types)
- 9) **Weight:** ~ 150 Kg. The weight refers to the above dimensions (CO 1000x2200 mm). It includes frame and counter-frame weight. That weight doesn't includes leaf covers.
- 10) **Leaf covering:** finishing cover on both the leaf sides available. Maximum applicable weight: 30 kg.
- 11) **Lock:** stainless steel, no vibrating
- 12) **Hinges:** nr. 3 stainless steel adjustable hinges
- 13) **Leaf frame finishing:** RAL or NCS painted or Stainless steel (satin or polished)
- 14) **Door frame finishing:** RAL or NCS painted
- 15) **Counter-frame:** RAL or NCS painted
- 16) **Accessories:**
 - Window 400x400mm - Optional
 - Porthole ϕ 400 mm – Opt.
 - Inductive proximity sensor (remote close/open position detection) – Opt.
 - Electromechanical block for door closer (for door remote closing) – Opt.
 - Drop-down sill – Opt.
 - Ventilation grid – Opt.
 - NCS Painting

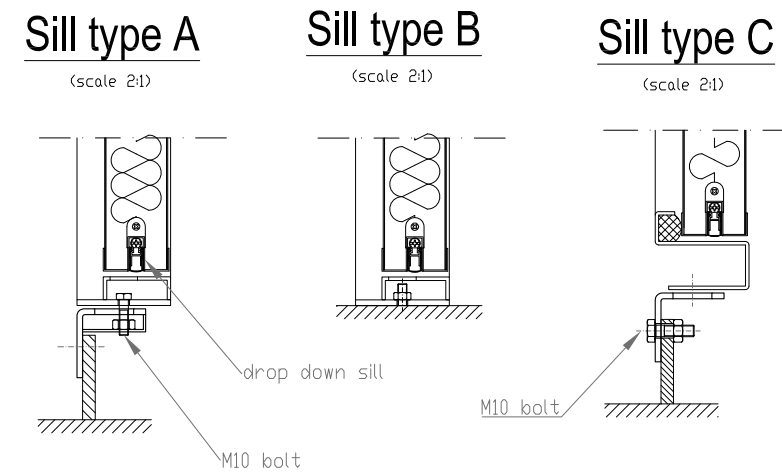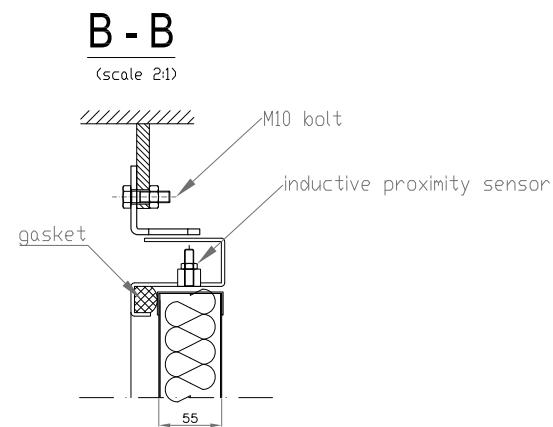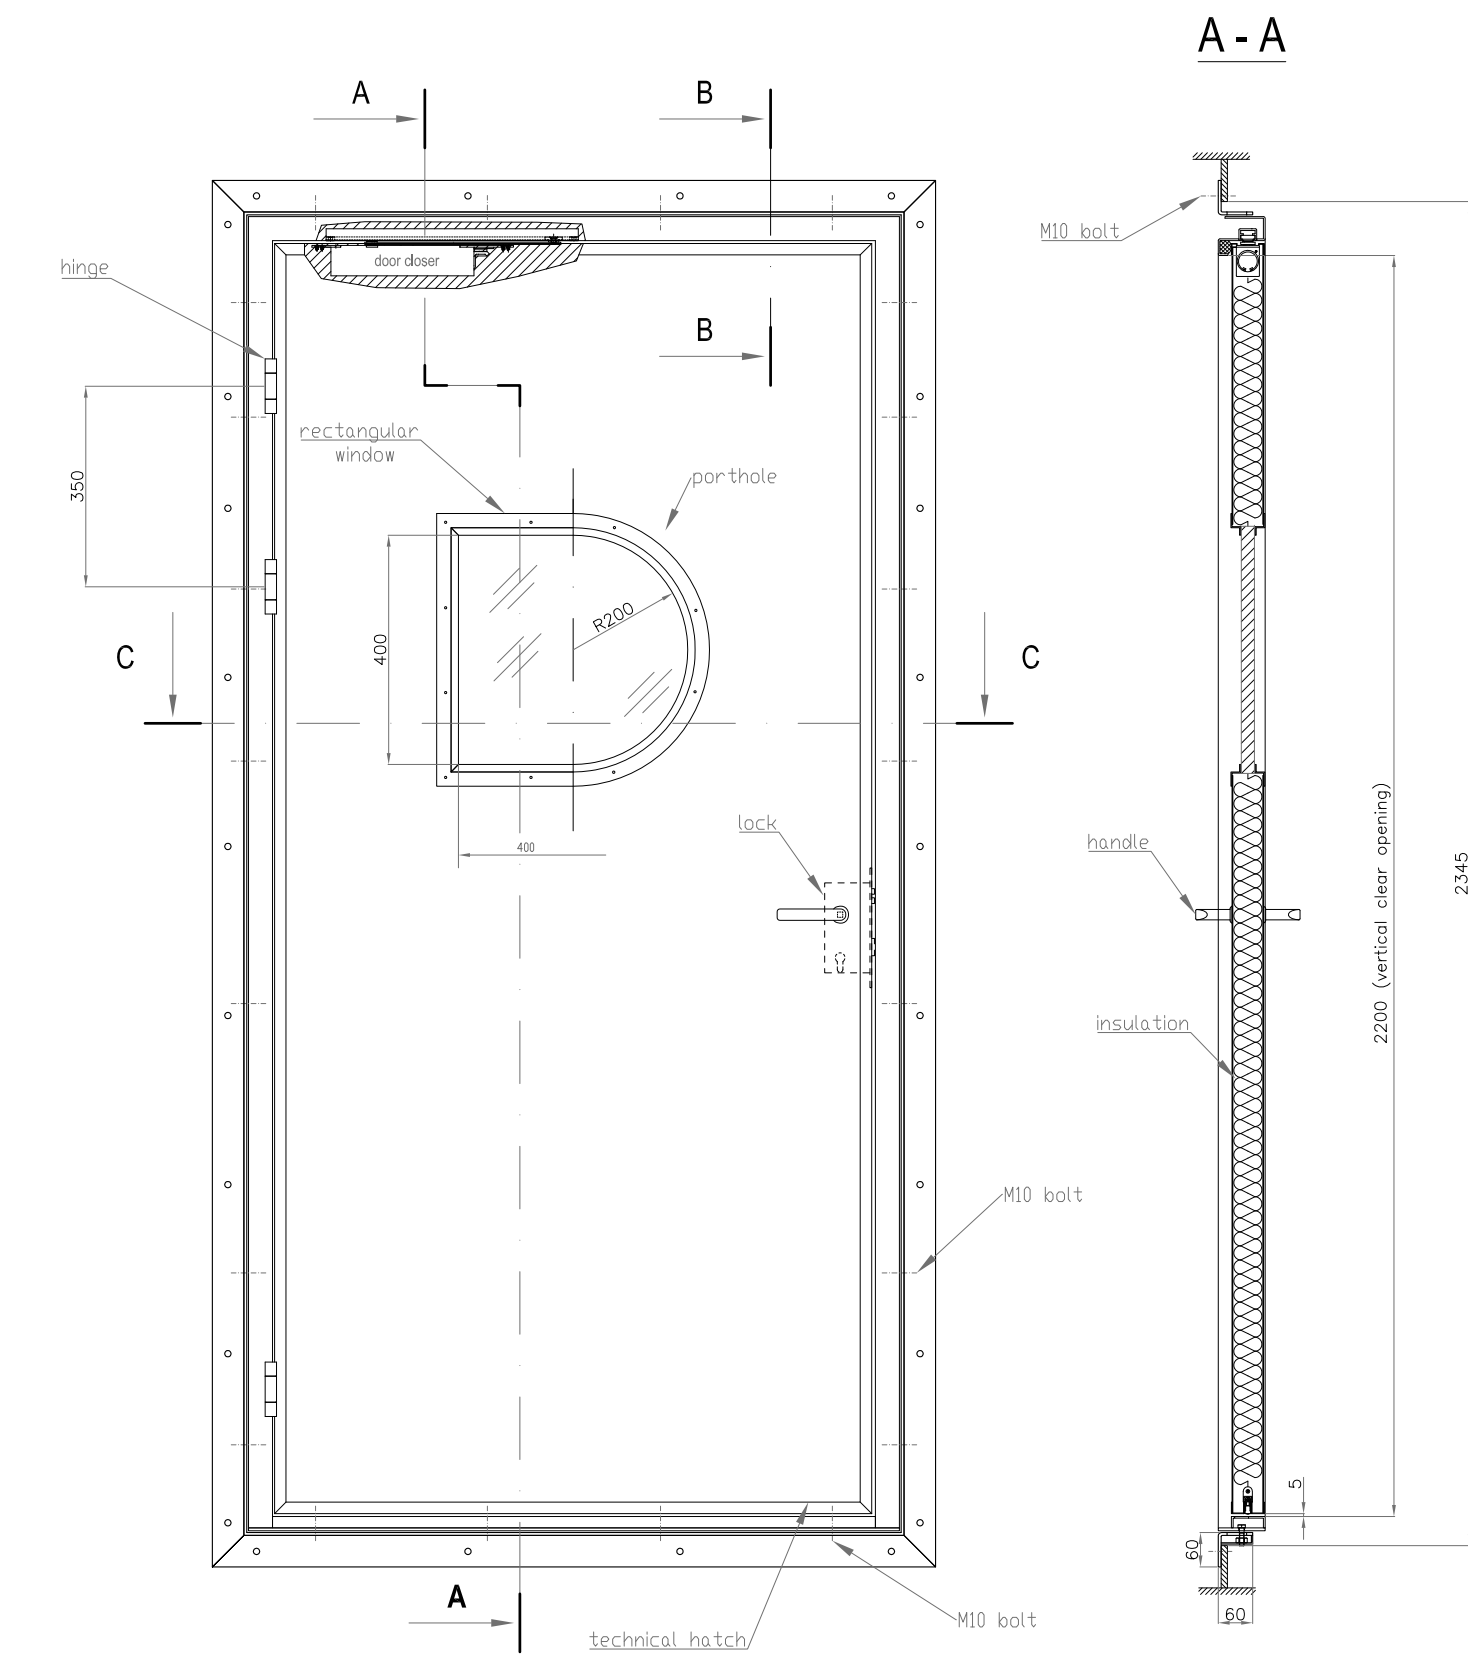


NOTES:

1. Clear Opening max : 1000x2200 mm
2. Maximum available leaf finishing weight : 30 kg
3. Nr 3 adjustable hinges
4. Rectangular window max dimension 400x400 mm
5. Porthole diameter 400 mm
6. Hidden Doorcloser

OPTIONALS:

1. Inductive proximity sensor
2. Window or porthole
3. Drop down sill
4. Electric release of door closer

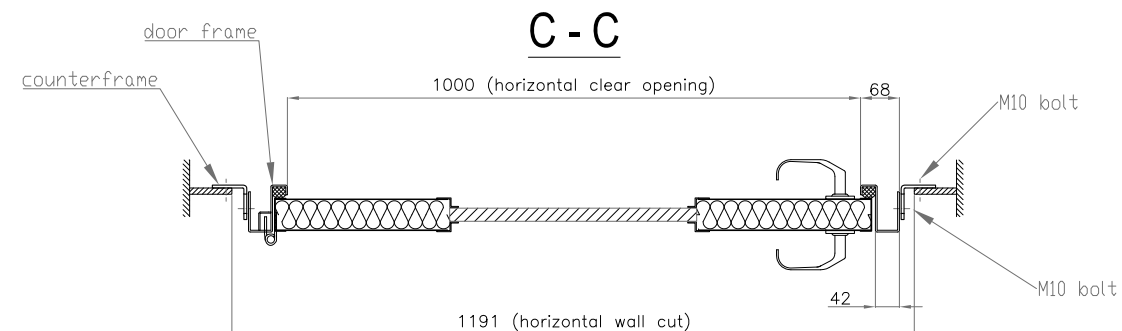

00	22/07/2015	PRIMA EMISSIONE		Gessa
REV.	DATE:	DESCRIZIONE / ISSUE		APPROVED
		Committente/Buyer:		Disegno # / Drawing # :
		Costruzione/Ship Name:		Commissa/Job:
		Titolo / Title:		Scala / Scale :
		B15 class rated hinged door (P_1H-B15Y)		