



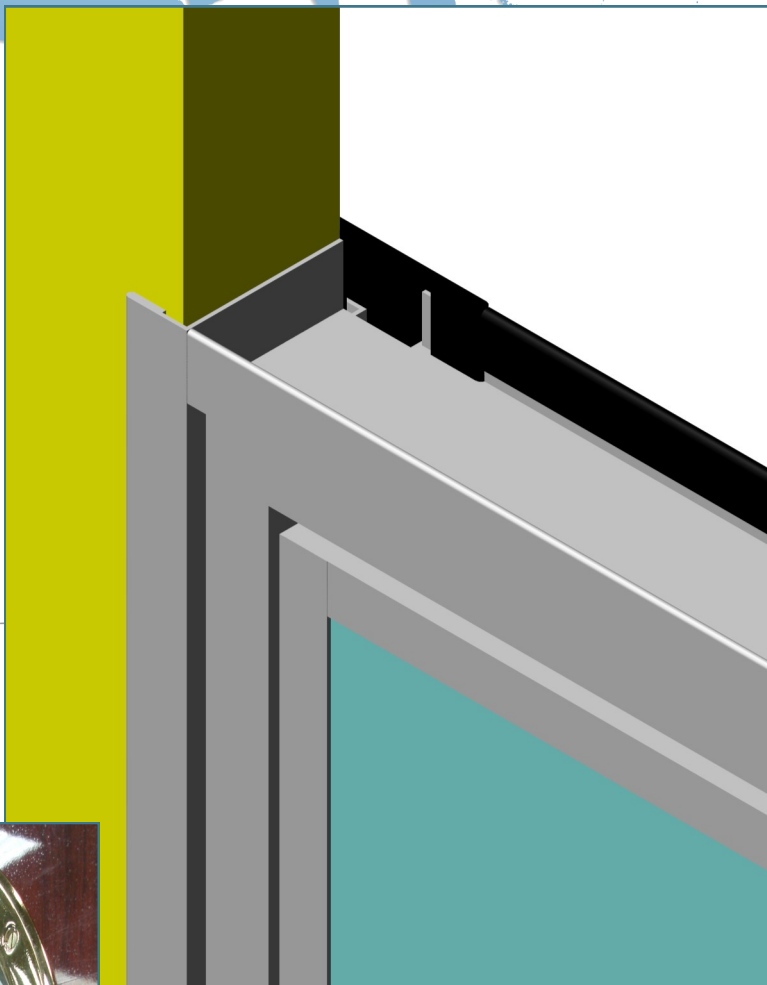

B15 HINGED DOORS

P_STD-Y

Alcinav S.r.l.
Via della Repubblica, 45/A
54011 - Albiano Magra - Aulla (MS) - ITALY
Tel.: +39 0187 415455
FAX: +39 0187 415750
www.alcinav.it - info@alcinav.it

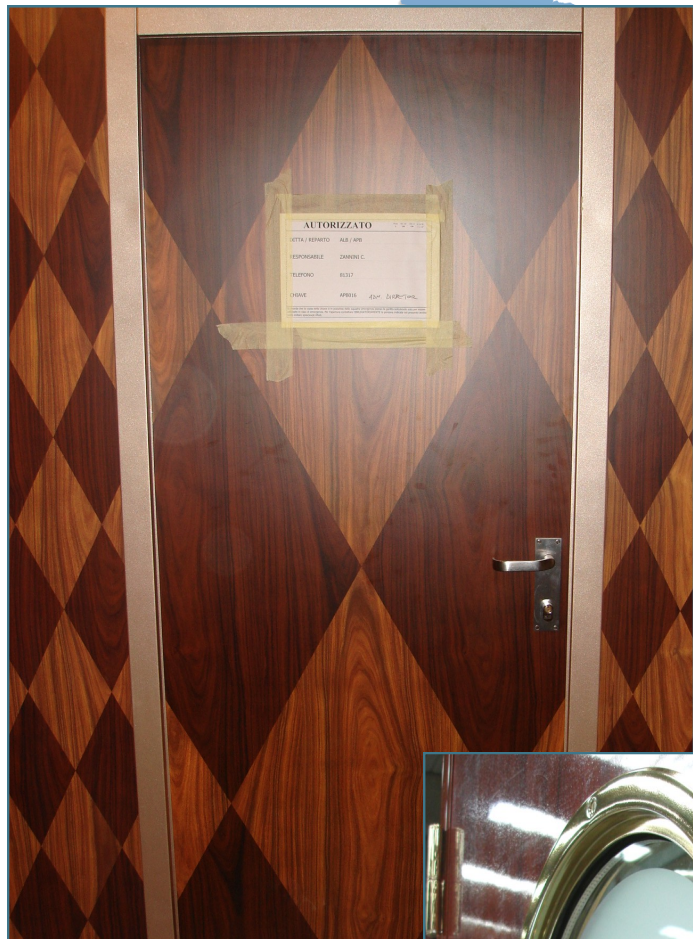

OPTIONALS

- Square porthole (window)
- Round porthole (window)
- Ventilation grid
- NCS Painting
- D-print finishing for frame
- Access code handle
- Bicolour frame

STANDARD FEATURES :

- IMO MED Certification B15 Rated Class
- Nr 3 Hinges satin chrome
- Hidden Self closing door "Geze"
- Lockset R&C or Vingcard or Schwepper
- Rubber gasket grey color
- Standard painting powder coating RAL codes
- 90° edge cutting on corner profile





B15 HINGED DOORS

Alcinav S.r.l.
Via della Repubblica, 45/A
54011 - Albiano Magra - Aulla (MS) - ITALY
Tel.: +39 0187 415455
FAX: +39 0187 415750
www.alcinav.it - info@alcinav.it

B15 RATED CLASS SINGLE LEAF HINGED DOOR MAIN FEATURES

- 1) **Art. name:** P_STD-Y
- 2) **Reference international rules:** SOLAS 74/88 Chapter II-2/9 – European Directive 96/98/CE (MED) and further modifications.
- 3) **Classification:** B15 rated class fire door, non watertight.
- 4) **Maximum dimensions:** Clear Opening 1000x2100 mm.
- 5) **Door type:** single leaf, hinged type.
- 6) **Leaf construction:** sandwich type, steel foil – rock wool – steel foil
- 7) **Leaf thickness:** 42 mm.
- 8) **Leaf finishing types:**
 - Galvanized steel (rough)
 - RAL or NCS painted
 - PVC pre-coated (several finishing types)
- 9) **Weight:** ~ 50 Kg. The weight refers to the above dimensions (CO 850x2100 mm). It includes frame and counter-frame weight. That weight doesn't include leaf covers.
- 10) **Leaf covering:** finishing cover on both the leaf sides available. Maximum applicable weight: 12 kg.
- 11) **Lock:** stainless steel, no vibrating
- 12) **Hinges:** nr. 3 stainless steel
- 13) **Leaf frame finishing:** RAL or NCS painted or Stainless steel (satin or polished)
- 14) **Door frame finishing:** RAL or NCS painted or Stainless steel (satin or polished)
- 15) **Counter-frame:** RAL or NCS painted or Stainless steel (satin or polished)
- 16) **Accessories:**
 - Window 300x465mm - Optional
 - Porthole ϕ 300 mm – Opt.
 - Ventilation grid – Opt.
 - NCS Painting

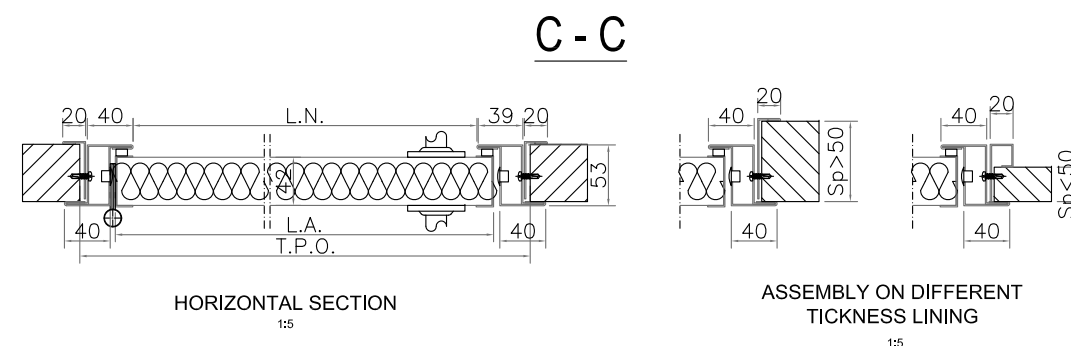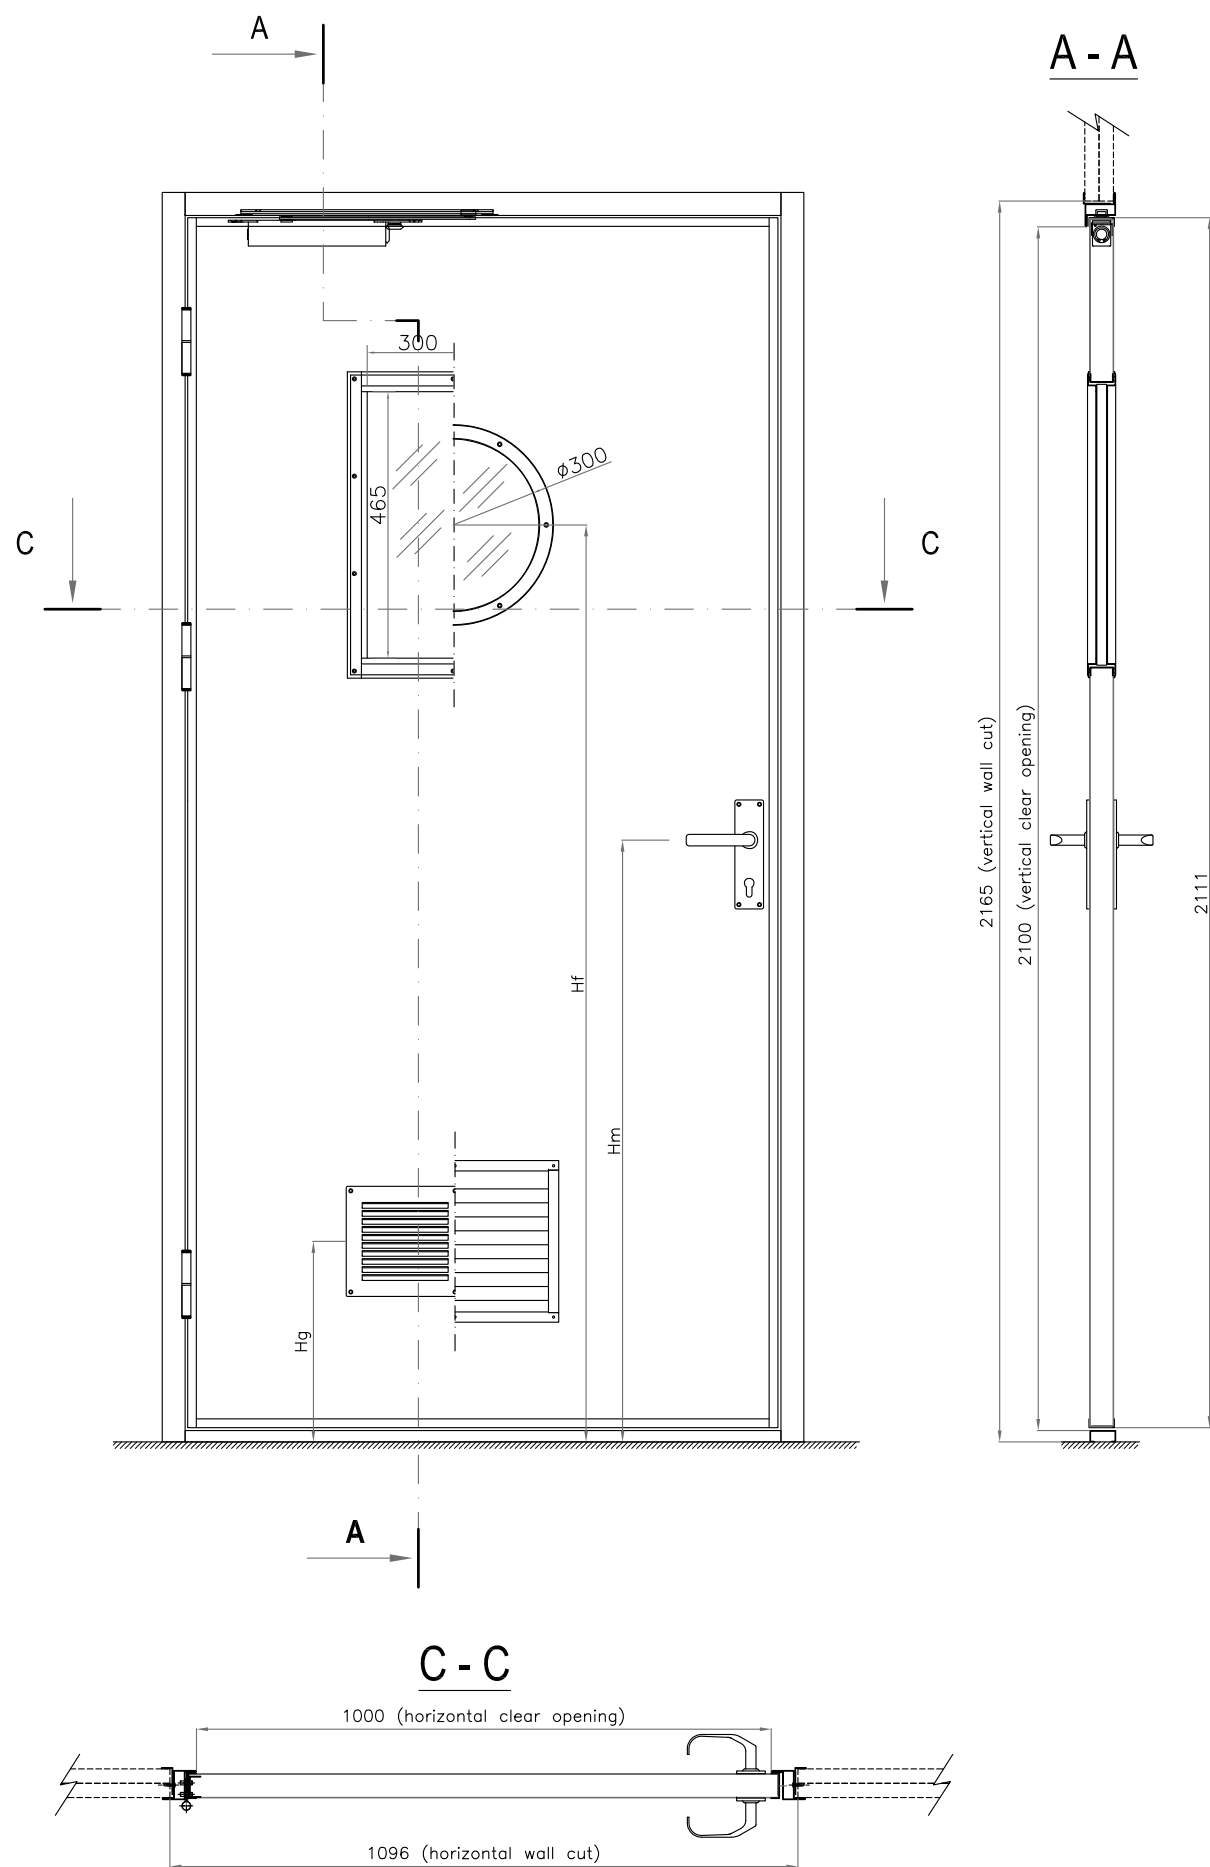

NOTES:

1. Clear Opening max : 1000x2100 mm
2. Maximum available leaf finishing weight : 12 kg
3. Nr 3 hinges
4. Rectangular window max dimension 300x465 mm
5. Porthole diameter 300 mm
6. Hidden Doorcloser
7. Assembly arrangement : to tighten the wall

OPTIONALS:

1. Window or porthole
2. Ventilation grille

00	22/07/2015	PRIMA EMISSIONE		Gessa
REV.	DATE:	DESCRIZIONE / ISSUE		APPROVED
		Committente/Buyer:		Disegno # / Drawing # :
		Costruzione/Ship Name:		Commessa/Job:
		Titolo / Title:		Scala / Scale :
		B15 class rated hinged door (P_STD-Y)		